

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 February 2001 (15.02.2001)


PCT

(10) International Publication Number
WO 01/11865 A1

- (51) International Patent Classification⁷: **H04N 5/00** Nick [GB/GB]; British Sky Broadcasting Limited, Grant Way, Isleworth, Middlesex TW7 5QD (GB).
- (21) International Application Number: PCT/GB00/03065
- (22) International Filing Date: 9 August 2000 (09.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
9918772.6 9 August 1999 (09.08.1999) GB
0001326.8 20 January 2000 (20.01.2000) GB
- (71) Applicant (for all designated States except US): **BRITISH SKY BROADCASTING LIMITED** [GB/GB]; Grant Way, Isleworth, Middlesex TW7 5QD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BODKIN, Nigel** [GB/GB]; British Sky Broadcasting Limited, Grant Way, Isleworth, Middlesex TW7 5QD (GB). **WILLAME, Xavier** [GB/GB]; British Sky Broadcasting Limited, Grant Way, Isleworth, Middlesex TW7 5QD (GB). **CROSSLEY, Robin** [GB/GB]; British Sky Broadcasting Limited, Grant Way, Isleworth, Middlesex TW7 5QD (GB). **JAMES,**
- (74) Agents: **MILHENCH, Howard, L.** et al.; R.G.C. Jenkins & Co., 26 Caxton Street, London SW1H 0RJ (GB).
- (81) Designated States (national): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

[Continued on next page]

(54) Title: IMPROVEMENTS IN RECEIVERS FOR TELEVISION SIGNALS

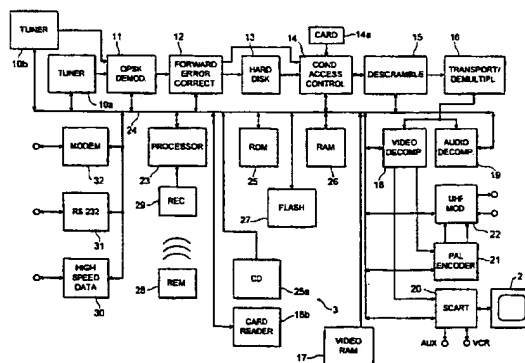

(57) Abstract: A Hard Disk Recorder (HDR) (3) is arranged to receive signals defining television programmes and television programme schedule data. The HDR receives updated programme schedule data substantially constantly in a dedicated programme schedule data channel. The HDR is arranged to output the programme schedule data for display on a television screen (2). The HDR comprises a hard disk (16) for recording received television programmes. A remote control (28) is provided to select television programmes to be recorded from the displayed programme schedule. Furthermore, the HDR is arranged to receive additional programme schedule information included in each of the received television channels which information is used to control the hard disk to record pre-programmed television programmes according to schedule. The hard disk is operable to record simultaneously two different television programmes received in different channels. Also, the HDR is operable to replay a currently broadcast programme offset in time. The time offset can be overcome by playing back the part of the programme inside the time offset at an increased frame rate. Furthermore, the HDR is arranged to receive transition signals indicating transitions between parts of programmes, such as transitions between advertisements and the "actual" programmes. The HDR is operable to use these transition signals, for example, to skip between transitions in previously recorded programmes replayed from the hard disk.

WO 01/11865 A1

WO0111865

Publication Title:

IMPROVEMENTS IN RECEIVERS FOR TELEVISION SIGNALS

Abstract:

A Hard Disk Recorder (HDR) (3) is arranged to receive signals defining television programmes and television programme schedule data. The HDR receives updated programme schedule data substantially constantly in a dedicated programme schedule data channel. The HDR is arranged to output the programme schedule data for display on a tele

64c

vision screen (2). The HDR comprises a hard disk (16) for recording received television programmes. A remote control (28) is provided to select television programmes to be recorded from the displayed programme schedule. Furthermore, the HDR is arranged to receive additional programme schedule information included in each of the received television channels which information is used to control the hard disk to record pre-programmed television programmes according to schedule. The hard disk is operable to record simultaneously two different television programmes received in different channels. Also, the HDR is operable to replay a currently broadcast programme offset in time. The time offset can be overcome by playing back the part of the programme inside the time offset at an increased frame rate. Furthermore, the HDR is arranged to receive transition signals indicating transitions between parts of programmes, such as transitions between advertisements and the "actual" programmes. The HDR is operable to use these transition signals, for example, to skip between transitions in previously recorded programmes replayed from the hard disk.

Data supplied from the esp@cenet database - <http://ep.espacenet.com>



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

IMPROVEMENTS IN RECEIVERS FOR TELEVISION SIGNALS

The inventions relates to improvements in receivers for television signals.

Background of the Invention

5 A Hard Disk Recorder (HDR) is known which comprises a television receiver and a hard disk for recording received television programmes. The HDR is arranged to be connected to the telephone network in order to receive through the telephone network television programme schedule information for display on a television screen. A telephone link must be established with the
10 provider of the programme schedule data every time the programme schedule data is to be updated. Such updating may be performed at regular intervals, say once a day. The programme schedule data may be used by a user to program the HDR in order to record a desired television programme.

 The requirement to establish a link with the HDR via a telephone
15 network is undesirable. This is because the HDR may not always "on line" for reasons such as costs, or because the telephone connection is to be used otherwise. Accordingly, the available programme schedule data may be out of date. If a user relies on the programme schedule information when programming his HDR to record a desired programme, he may unknowingly
20 rely on out-of-date programme schedule data, which in turn may result in the desired programme not being recorded.

Also, due to the ever increasing variety of television channels and programmes, it is getting more likely that there will be a clash in the programme schedule of television programmes which the user would wish to record. Currently known video cassette recorders (VCRs) and HDRs fail to
5 address this problem.

An HDR is also known which allows the recording of a broadcast television programme, while simultaneously replaying the same television programme offset in time. This is useful, for example, when a viewer misses the start of his favourite programme by a few minutes but nevertheless does
10 not wish to wait until the programme has been recorded completely before he can start playing back the recorded programme. However, in the case of live programmes such as live sport events, the knowledge that the "real" live event is running exerts a strong emotional pull. At present, the user has the choice of catching up with the live broadcast simply by switching to the live
15 broadcast, thereby ignoring the missed period, or by watching the programme offset in time.

In addition, some parts of a recorded television programme may not be of interest to the viewer. For example, the viewer may not be interested in advertisements. Users of VCRs who not interested in advertisement breaks,
20 for example during a movie, respond to this simply by fast-forwarding during the advertisements. Also, when watching a series of recorded video clips, the user may not be interested in some of the clips but can only jump forward to

the next clip of interest by fast-forwarding the video tape. This clearly is inconvenient. To record parts of programmes in which the viewer is not interested, in any case, is a waste of hard disk storage capacity.

Advertisements broadcast during interruptions of a television programme are generally geared to appeal to the potential viewers of the television programme. Since this is not a very exact science, it may be that in certain environments the broadcast advertisements do not appeal to the viewers at all, or do at least not use the full potential of the advertisement breaks. The prior art has not addressed this problem.

Accordingly, it is desirable to at least address these and other problems of the prior art.

Summary of the Invention

According to one aspect of the invention, there is provided a receiver for receiving signals representative of television programmes in a plurality of channels, the receiver comprising: a first tuner for receiving signals in a first channel; a second tuner for simultaneously receiving signals in a second channel; and a recorder for recording data representative of signals in the first and the second channel received simultaneously by the first tuner and the second tuner.

According to another aspect of the invention, there is provided a receiver for receiving signals in a plurality of channels, the signals being representative of television programmes and programme schedule data which

defines events in terms of channels, programmes and broadcast times, the receiver comprising: a decoder for separating the signals representative of the television programmes from the signals representative of the programme schedule data; a recorder for recording data representative of the television programmes; means for producing output signals defining an image of events in the programme schedule for displaying on a television screen, which schedule is in accordance with the received signals representative of the programme scheduling data; and a user operable selector operable to select events identified in the image of events and responding to such user selection to cause the recorder to record data representative of the television programmes corresponding to the selected events.

According to another aspect of the invention there is provided a receiver for receiving signals representative of a television programme, and for outputting simultaneously a signal representative of the television programme shifted in time, the receiver comprising a recorder for recording data representative of the television programme, and for playing back data representative of the time-shifted television programme, wherein the receiver is operable to output signals representative of the television programme at an increased frame rate so as to reduce the time shift.

Preferably, the receiver may comprise a first data buffer for buffering data representative of the television programme to be recorded by the recorder; a second data buffer for buffering data being played back from the recorder; and

a processor for selectively causing data to be transferred from the first data buffer to the recorder at a first data rate or from the recorder to the second data buffer at a second data rate, wherein the second data rate is higher than the first data rate to cause the receiver to output signals representative of the television programme at the increased frame rate so as to reduce the time shift. The first data rate is in accordance with the bandwidth of received signals, and the second data rate is in accordance with a user-selected frame rate.

According to another aspect of the invention there is provided a receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and information signals indicative of a predetermined portion of the television programme, the receiver comprising: a decoder circuit for generating control signals responsive to receipt of the information signals; and a recorder for receiving the control signals, and for recording data representative of the received television signals, the recorder being responsive to the control signals to interrupt recording of data representative of the received television signals during reception of television signals representative of the predetermined portion of the television programme.

The information signal may comprise a first information signal representative of the start of the predetermined portion of the television programme, and a second information signal representative of the end of the predetermined portion, wherein the decoder is arranged to generate a first control signal in response to the first information signal, and a second control

signal in response to the second information signal, and the recorder is arranged to interrupt the recording of data representative of received television signals responsive to the first control signal, and to resume the recording of data representative of received television signals responsive to the second control
5 signal.

Alternatively, the information signals and the control signals may be indicative of the duration of the predetermined portion of the television programme, wherein the recorder is arranged to respond to one of the control signals by interrupting the recording of data representative of received television
10 signals for the duration indicated by the one control signal.

According to another aspect of the invention there is provided a receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and information signals indicative of a predetermined portion of the television programme, the
15 receiver comprising: a decoder circuit for generating control signals responsive to receipt of the information signals; a storage medium for storing video data for display on a television screen; and output means for receiving the control signals, and for outputting selectively for display on a television screen received television signals or video signals representative of the video data from the
20 storage medium, the output means being responsive to the control signals to output the video signals during reception of television signals representative of the predetermined portion of the television programme.

The information signal may comprise a first information signal representative of the start of the predetermined portion of the television programme, and a second information signal representative of the end of the predetermined portion, the decoder is arranged to generate a first control signal
5 in response to the first information signal, and a second control signal in response to the second information signal, and the output means is arranged to output the video signals in response to the first control signal, and to output the television signals in response to the second control signal.

Alternatively, the information signals and the control signals may be
10 indicative of the duration of the predetermined portion of the television programme, wherein the output means is arranged to respond to one of the control signals by outputting the video signals for the duration indicated by the one control signal.

According to another aspect of the invention there is provided a
15 receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and information signals indicative of the start and/or the end of a predetermined portions of the television programme, the receiver further comprising: a recorder for recording data representative of received signals, and for playing back recorded data for
20 display on a screen of the television programme represented thereby; and user operable control means operable to cause the recorder to detect recorded data representative of the information signals to skip to the start and/or end of the

predetermined portion of the television programme during playback of the recorded data.

In the foregoing the recorder may comprise a hard disk or an optical storage medium and the storage medium may comprise a hard disk or a CD.

5 **Brief Description of the Drawings**

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a schematic diagram of a television receiver system;

Figure 2 is a functional block diagram of a Hard Disk Recorder
10 (HDR);

Figure 3 is a functional diagram showing interaction between hardware and software of the HDR of Figure 2;

Figure 4 is a schematic illustration of a remote control which may be used to control the HDR;

15 Figure 5 is a functional block diagram of a hard disk arrangement;

Figure 6 is a schematic representation of a "services" screen;

Figure 7 is a schematic representation of a "TV guide" screen;

Figure 8 is a schematic representation of a "planner" screen;

Figure 9 is a schematic representation of a "system setup" screen; and

20 Figure 10 is a schematic representation of an "advertisements" screen.

Detailed Description of an Embodiment of the Invention

1. System Overview

Referring now to Figure 1 of the accompanying drawings, a television system 1 comprises a television 2 (TV), a hard disk recorder 3 (HDR), and a satellite dish 4. The HDR 3 comprises a satellite receiver which is connected to the satellite dish 4 for reception of signals from a satellite (not shown). The HDR receives signals from the satellite dish 4, including television signals, in a plurality of channels.

2. Hard Disk Recorder (HDR) - Overview

Figure 2 of the accompanying drawings shows the HDR 3 in greater detail. Signals from the dish antenna 4 (shown in Figure 1) are input to first and second tuners 10a and 10b and from there to a quadrature phase shift key (QPSK) demodulator 11. The first and second tuners 10a and 10b are tunable into the same or different channels for simultaneous reception of the same or different television programmes. Demodulated signals are error-corrected by way of a forward error corrector circuit 12. The HDR 3 comprises a hard disk 13 which receives from the forward error corrector circuit 12 compressed video and audio data forming television programmes for recording and subsequent playback thereof, as will be described in greater detail hereinbelow. The received signals comprise digitally encoded data. It is envisaged that the data will be compressed using for example the

DVB/MPEG 2 standards which permit both programme data and additional data (for example interactive service data) to be transmitted in a single channel. DVB/MPEG 2 enables high compression ratios to be achieved. The hard disk 13 receives and stores compressed data. The data is decompressed
5 only after retrieval from the hard disk 13.

Satellite (and indeed cable) programmes are usually scrambled to prevent unauthorised access by non-authorised subscribers. The HDR 3 therefore comprises a conditional access control circuit 14 which co-operates with a smart card 14a to determine whether the viewer has subscribed to a
10 particular channel and is therefore authorised to access the channel. Parental control over channel access is also provided, at least in part, by the access control circuit 14. The HDR 3 further comprises a descrambling circuit 15 which is controlled by the access control circuit 14 to enable the descrambling of the signal by authorised subscribers.

15 Descrambled data is supplied to a transport/demultiplexer 16 which separates the data into video data, audio data, user services data, programme scheduling data, etc. for distribution to various locations within the HDR 3. The HDR 3 also comprises a video decompression and processing circuit 18 utilizing a dedicated video RAM 17, and an audio decompression and
20 processing circuit 19, operating according to the MPEG standard, for example. The video and audio decompression and processing circuits 18 and 19 receive demultiplexed signals directly from the transport/demultiplexer 16,

or from the hard disk 13. Decompressed video signals are input to a SCART interface 20 for direct input to the TV 2 and to a PAL encoder 21 where they are encoded into the PAL format for modulation by a UHF modulator 22 for output to the UHF input of the TV if so desired.

5 The HDR 3 is controlled by a processor 23 which communicates with the various units of the system via a bus 24. The processor 23 has associated with it ROM 25 (optionally including a CD-ROM drive 25a), RAM 26 (comprising both dynamic RAM and static RAM) and a flash (non-volatile and writable) memory 27.

10 The processor 23 controls operation of the HDR 3 by tuning the tuners 10a and 10b to receive signals for the desired channels from the dish antenna 4 by controlling the demultiplexing, descrambling and decompression so that the desired programme and/or interactive service data is displayed on the screen of the TV 2, and by controlling the hard disk 13 to record desired
15 television programmes or to play back previously recorded television programmes. Viewer selection of desired programmes and customer services is controlled by way of a remote control unit 28 which in response to viewer manipulation thereof transmits control signals to a receiver 29 for input to the processor. The remote control unit 28 also allows for the control of the
20 operation of the hard disk 13 to record television programmes, to play back recorded television programmes, to program the recording of television

programmes, etc. The remote control unit 28 will be described in greater detail hereinafter.

The HDR 3 further comprises a high-speed data interface 30 and an RS232 interface 31 providing a serial link. The high-speed data interface 30 and the RS 232 interface may be connected to a PC and/or a games console 8 and/or other digital equipment (not shown). The high speed data interface 30 enables the HDR 3 to be connected to other devices (not shown) for example to enable reception of services transmitted via other media such as broadband cable and digital terrestrial broadcast. The HDR 3 further comprises a modem interface 32 for connecting a telephone network.

3. Interaction between Hardware and Software of the HDR

Operation of the HDR 3 is controlled by software that makes the processor 23 responsive to control signals from the remote control unit 28 and to data included in the signal received by the dish antenna 4 and/or stored in the memory units 25 to 27. A schematic representation of the interaction between hardware and software in the HDR 3 is shown in Figure 3 of the accompanying drawings. The data in an incoming signal is separated by the transport/demultiplexer 16 into video data and information data. The information data is distributed around the hardware and software, as will be described in greater detail hereinafter. The video data and the audio data is demultiplexed and output in suitable form for supply to the TV 2 or to the hard disk 13 by the MPEG video and audio circuits 18 and 19. When

information is to be displayed either with or instead of the video data, data representing the information is output in suitable form for supply to the TV via an on-screen display (OSD) driver 33 and the video circuit 18. Signals from the OSD driver 33 and the video circuit 18 are combined as appropriate
5 before being supplied to the TV 2.

Operation of the software and hardware of the HDR 3 is based around an operating system 35. The conditional access controller 14 has associated software 36 which interfaces with the operating system. The processor 23 has its own base operating system 37 which interfaces to the HDR operating
10 system 35. Applications such as an intelligent electronic programme guide (IEPG) 39 and other applications 40 including interactive services interface to the operating system 35 via an applications interface 41 and associated application interpreter 42.

The software for conditional access applications such as the IEPG 39
15 are installed permanently within non-volatile memory, e.g. the ROM 25, of the HDR 3, but variable information such as new access codes and TV programme scheduling details is stored in the RAM 26 and updated regularly via signals received from the dish antenna 4. Demodulated signals from the demodulator 11 are input to the transport/demultiplexer 16 which examines
20 the data to decide where it should be sent. From time to time significant changes may be made to conditional access codes or to the manner in which the IEPG 39 displays programme information. Also, programmes for

additional applications, say an interactive shopping or banking service for example, are also supplied via the satellite for the HDR 3. Such application data is routed by the transporter/demultiplexer 16 directly to the appropriate areas 40 of the memory 26, 27.

5 Operating data 43 is supplied on a substantially continuous basis in every channel. The operating data 43 includes conditional access data 44 associated with a channel and/or programmes therein which enables the conditional access controller 14 to determine whether or not access should be allowed to a particular programme by descrambling the data therefor.

10 Additionally, operating data relating to interactive services is transmitted in dedicated interactive service channels which carry control and information data for use by the hardware and software of the processor 23 and the associated memory devices 25 to 27. Thus, the operating data 43 depicted in Figure 3 also includes interactive service programs and information 46 (for

15 example relating to personal banking services) and indeed any other data 47 required on a substantially continuous or regular basis for the aforementioned interactive services.

 The transport/demultiplexer 16 is arranged to supply the operating data 43 to the processor 23. The data is acted upon by the operating system

20 35, the conditional access and/or other operating software. The processor 23 responds to the data by sending appropriate commands or signals to other units within the system. Control data is also transferred between the

processor 23 and such units as the transporter/demultiplexer 16, the hard disk 13, the video and audio decompressors 18, 19, the remote control receiver 29 and the high-speed data interface 30 via respective drivers 48 to 53.

The combined hardware and software of the HDR 3 enables the data in
5 received channels to be decoded for display or recording of viewer selected programmes. The scrambling is controlled on a continuous basis and the HDR can be updated with new descrambling codes as and when required. Data for interactive services is supplied and updated substantially continuously and programmes relating to newly selected interactive services
10 are downloaded into the HDR 3.

Operation of the HDR 3 in receiving and decoding data representing television programmes and data defining scheduling and other information related to the programmes is described in detail in our International (PCT) patent application published as WO 96/37996, aforementioned. Operation of
15 the HDR 3 in providing interactive services is described in our International (PCT) application published as WO 97/23997, aforementioned.

Within the Digital Video Broadcasting (DVB) standards for digital TV transmission there exists a standard for the transmission of schedule information such that it can be decoded and presented correctly to subscribers
20 in the form of an Electronic Programme Guide (EPG).

This DVB standard is known generally as the SI standard and can be found in the specification: ETS 300 468. ETSI Digital Broadcasting Systems

for Television. Sound and Data Services: Specification for Service Information (SI) in Digital Video Broadcasting (DVB) Systems 2nd edition. Guidelines for using the specification are given in ETSI ETR 211 - DVB SI Guidelines.

5 In order to allow broadcasters to utilise any proprietary features of their EPGs the SI standard includes methodology for extending the format of the service information (SI) stream by the inclusion of private data tables and descriptors. The HDR 3 is, of course, designed to support the mandatory parts of the SI specification.

10 4. Remote Control

Figure 4 illustrates the remote control 28 for the control of the HDR 3. A manipulation of the keys on the remote control 28 causes the remote control 28 to transmit to the HDR 3 corresponding command signals.

15 The remote control comprises an on/off key 98. a manipulation of which causes the HDR 3 to be switched on or off. Also, the remote control 28 comprises a playback key 99, a record key 100, a pause key 101, a stop key 102, a fast forward key 103, and a fast rewind key 104. Manipulation of the playback key 99 causes the HDR 3 to playback a recorded television programme from the hard disk 13. Manipulation of the record key 100 causes
20 a television programme to be recorded on the hard disk 13. A manipulation of the pause key 101 causes the HDR 3 to halt a currently played back television programme, as described above, while a manipulation of the stop key 102

causes the playback to be stopped. The fast forward key 103 and the fast rewind key 104 allow a user to operate the HDR 3 in fast forward or fast rewind modes, as will be described in detail hereinafter.

In addition, the remote control 28 comprises a menu key 105, a TV
5 guide key 106, a services key 107, and an interactive services key 108. A manipulation of one of these keys 105 to 108 causes the HDR 3 to display a corresponding menu screen, as discussed above. Furthermore, the remote control 28 comprises an "up" key 109, a "down" key 110, a "right" key 111, and a "left" key 112. Manipulation of these keys allows a user to select
10 displayed menu items. An operation associated with a selected menu item is executed by manipulation of an execute key 113. Alternatively, a selected menu item is marked as selected by manipulation of a select key 114. Similarly, the remote control 28 comprises colour keys 115 of different colours. Manipulation of one of the colour keys 115 allows a user to select a
15 menu item which is indicated on a displayed menu screen to be associated with the colour of the manipulated colour key, as will be described in detail hereinbelow.

Also, the remote control 28 comprises number keys 116 whose manipulation causes the HDR 3 to tune to a channel corresponding to the
20 number entered through the number keys 116.

5. The Hard Disk

Since the first and second tuners 10a and 10b can be tuned to receive different channels, it is possible for a first television programme in one channel to be displayed on the TV 2, while at the same time a second television programme in another channel is recorded on the hard disk 13. Furthermore, as will be explained below, two different television programmes may be recorded simultaneously on the hard disk 13.

The hard disk 13 of the HDR 3 is similar to hard disks used in computer systems for storing large amounts of data. The hard disk 13 has a capacity of several gigabytes (e.g. 10-20 gigabytes) and receives video and audio data for storage in the compressed form in which it is received, for example, in accordance with the DVB/MPEG 2 standards as discussed above. This allows for the storage of several hours of television programmes (e.g. 10-15 hours) on the hard disk 13. The hard disk 13 comprises two storage areas, one for the storage of television programme data, and the other for storing "metadata" which is used to control the hard disk 13, as will be discussed in greater detail hereinbelow. The operation of the hard disk 13 is controlled by the processor 23. The processor 23 sends control commands to the hard disk 13, to start/stop the recording of a television programme, to play back a recorded television programme, etc.

Referring now to Figure 5 of the accompanying drawings, a schematic block diagram of the arrangement of the hard disk 13 is shown. The hard disk

13 has three data channels through two of which data is received for storage on the hard disk 13 and through one of which it is output for subsequent displaying of television pictures. The three data channels consist of two data input channels 54 and 55 and one data output channel 56. Each of the data channels has associated with it a data buffer 57, 58 and 59, respectively. Each of the data buffers 57, 58 and 59 comprises a RAM of sufficient size to store several seconds of data (e.g. 8 megabytes). The operation of the data buffers 57, 58 and 59 as well as that of the hard disk 13 are controlled by the processor 23.

10 The hard disk 13 is operable to manage simultaneous reception of data through the data channels 54 and 55 and output of data through the data channel 56. Data received through the data channels 54 and 55 is not stored directly on the hard disk 13 as it is received but is buffered by the buffers 57 and 58, respectively. Likewise, data to be output through the data channel 56 is not output directly as it is read from the hard disk 13 but is buffered in the buffer 59.

20 The hard disk 13 is capable of managing a data rate which is higher than the rate at which data can be transferred through at least two of the three channels 54, 55 and 56. That is, the hard disk 13 is capable of managing a data rate at least as high as the rate of data transmitted through all three channels 54, 55 and 56 combined. Thereby, the hard disk 13 is capable of

simultaneously storing data received through both the input channels 54 and 55 and outputting data through the output channel 56.

This is achieved by buffering the received data and the data to be output in the buffers 57, 58 and 59, and by switching between them in order to transfer data from the input buffers 57 and 58 to the hard disk 13, or to transfer data from the hard disk 13 to the buffer 59. Although hard disks comprising separate heads for writing and reading are available, in the interest of cost the hard disk 13 comprises one single head for both writing onto and reading from the hard disk 13. Therefore, while the hard disk 13 at any point in time stores/reads data associated with only one of the three data channels 54, 55 and 56, it sequentially stores/reads data associated with the three channels 54, 55 and 56, thereby "virtually" dealing with the three data channels simultaneously.

The switching is controlled by the processor 23 by arbitrating between any three of the buffers 57, 58 and 59 at a frequency which is in accordance with their buffer size so as to prevent a data overflow and thereby data loss. For example, if the buffers 57, 58 and 59 are capable of storing 30 seconds of received data each, and the HDR 3 is operated to record two simultaneous television programmes received through the channels 54 and 55, then the hard disk 13 is operated to receive alternately data from the buffers 57 and 58 at an alternation cycle of 30 seconds or less, transferring the buffer content to the hard disk 13 each time the processor switches from one of the buffers 57, 58

to the other. Accordingly, it is possible to record simultaneous/overlapping television programmes received by the first and second tuners 10a, 10b in different channels.

The buffering of incoming as well as outgoing data by the data buffers 57, 58 and 59 means that the hard disk 13 does not need to be synchronised to a particular input or output data rate. Instead, the hard disk 13 always reads and stores data at the same constant data rate. The amount of data stored on or read from the hard disk 13 is determined by the duration for which the hard disk 13 is switched through for data transfer to the respective one of the data buffers 57, 58 or 59. During such time data is transferred from or to the respective data buffer at the constant data rate. While the reception data rate through the channels 54 and 55 or the output data rate through the channel 56 may vary (for example depending on the bandwidth of received television signals, or depending on the playback mode), the rate of data transferred between any of the buffers 57, 58 and 59 and the hard disk 13 is constant and determined by the data rate the hard disk 13 is capable to manage.

The hard disk 13 is controlled by the processor 23 to operate in different playback modes, including forward and backward modes, in which a recorded programme can played back at the normal frame rate or at a reduced frame rate (i.e. slow motion). The hard disk 13 is also operable in a fast forward and a fast rewind mode, in which a recorded television programme

can be played back at an increased frame rate. The viewer may select any of these modes by giving appropriate commands via the remote control 28.

5.1 Skipping Undesired Programme Parts

In a skip mode, the processor responds to signals from the remote control 28 by controlling the hard disk 13 to skip forwards and backwards through recorded programmes, to skip back to the beginning of a recorded programme, or to skip forward to the next recorded programme. For this purpose, the beginning of a recorded television programme on the hard disk 13 is marked by storing metadata in the form of an indicator pointing at and thereby marking the beginning of the programme.

The indicator data along with other metadata data used for controlling the hard disk 13 is stored in a metadata area of the hard disk 13. The indicator data is based on the standard time codes which is transmitted with television programme signals.

During playback the viewer may wish to pause a programme part way through while he goes and does something else. When the viewer operates the remote control 28 to give a command to pause the playback, the processor 23 generates an indicator signal and causes the hard disk 13 to store corresponding indicator data in the form of a time code in the metadata area on the hard disk 13. When the viewer wishes to resume the viewing of the programme, an appropriate command via the remote control 28 causes the processor 23 to control the hard disk 13 to read the stored time code and to

skip to the corresponding hard disk position to resume playback of the programme from that position. In other words, the HDR 3 "remembers" when the viewing of a recorded television programme was interrupted and resumes the playback of the remaining television programme accordingly.

5 Programmes may be broadcast which include "skip" signals indicating the start and/or the end of parts of the programmes (for example parts of programmes separated by advertising breaks). These skip signals are time code-based and are transmitted in each channel together with the television signals. When the HDR records a television programme that includes skip
10 signals in the television signals, the HDR 3 causes the hard disk 13 to store skip codes representative of the skip signals as a list of successive skip codes in the metadata area on the hard disk 13. During playback of such a television programme a "skip" mode may be selected (by user manipulation of the remote control) in which the processor 23 responds to the stored skip codes to
15 control how programme signals are read from the hard disk 13. Thus, for example, the skip codes might identify time codes for the start and end of advertising breaks in a programme and the processor 23 may be arranged to respond to the skip codes by controlling the hard disk 13 to output television signals for the programme until the frame corresponding to the start time code
20 is reached and then to continue outputting signals from the frame corresponding to the end time code. In this way advertising breaks may be skipped during playback of a recorded programme.

5.2 Halting a Television Programme and Catching-Up Again

The HDR 3 is operable to display a television programme which is currently being received through one of the tuners 10a, 10b in two different playback modes. In the first display mode, the television programme is displayed "directly" without being recorded on the hard disk 13. In the
5 second playback mode, the currently received television programme is recorded on the hard disk 13 and the recorded television programme is played back from the hard disk 13. The resulting time shift between the played back television programme and the television programme as it is recorded is
10 marginal and is not perceptible by a viewer.

Starting from either of these playback modes, the hard disk 13 is operable to simulate the halting of a currently displayed television programme and to resume playback of the programme any time after the moment at which it was halted. If the user wishes to halt the current television programme
15 while the HDR 3 is in the first playback mode, he may do so, for example, by manipulating the pause button on the remote control 28. The processor 23 is arranged to respond to a "pause" signal from the remote control 28 by controlling the hard disk 13 to start recording the current television programme. In the second playback mode, the hard disk 13 simply carries on
20 recording.

When "pause" is selected, the processor 23 "freezes" the current television picture frame by causing the same frame to be repeatedly output to

the TV 2. When the user wishes to resume watching the television programme, he may do so by again manipulating the pause button on the remote control 28. The processor 23 responds to this second pause signal by causing the hard disk 13 to output the recorded data for the halted television programme from the moment at which the user first manipulated the pause button.

The hard disk 13 continues recording the television programme as it is received by one of the tuners 10a or 10b. In other words, the hard disk 13 can simultaneously record a concurrently received television programme and play back the television programme offset in time by the period for which the television programme was halted. (The manner in which the hard disk records and plays back simultaneously is described above in connection with Figure 5.)

The strong emotional pull of a broadcast live event, for example a live sports event, makes it desirable to be able to catch up with the actual live broadcast after it has been halted. One possibility of catching up is, of course, to switch from playing back the recorded programme shifted in time to displaying the programme as it is received by one of the tuners 10a or 10b (and simultaneously recorded by the hard disk 13 in the second playback mode), thereby ignoring the period during which the displaying of the television programme was halted.

Another possibility is to catch up by skipping advertising breaks or any other parts of the television programme in which the viewer is not interested. As discussed above, the HDR 3 is arranged to receive broadcast signals that indicate the start and/or end of advertising breaks or predetermined parts of the television programme (such as the half-time break
5 of a football match), and to store corresponding data pointing at the start and/or the end of such programme parts on the hard disk 13 together with the data representing the television programme. On receipt of an appropriate command from the remote control 28, the processor 23 reads this data from
10 the hard disk 13, and in response thereto jumps to the next point of the recorded television programme, for example to the end of an advertisement break. If there is more than one advertisement break inside the period in which the live broadcast was halted, then this operation can be repeated by the user by giving the same command during any advertisement break or any
15 other undesired part of the television programme that can be skipped in this manner.

The HDR 3 is also able to catch-up dynamically. To this end during playback the recorded television programme is played back at an increased speed relative to the "live" speed. For example, if a broadcast was halted for
20 one minute, and the television programme recorded during that one minute was replayed from the hard disk 13 at 125% of its normal (live) speed, then the time offset caused by the halt would be overcome in four minutes. The

playback speed is increased by retrieving data from the hard disk 13 at an increased rate and by "dropping" frames of the television picture to be displayed during playback. The rate of data retrieval is increased by transferring more data from the hard disk 13 to the data buffer 59 (see Figure 5), e.g. by switching the hard disk 13 to the buffer 59 more frequently and/or for longer periods of time (see the discussion of Figure 5 hereinabove). The catching-up rate, i.e. the playback speed can be selected by the viewer via the remote control 28. This dynamic catching-up can be combined with the above described skipping of advertisement breaks or other undesired parts of television programmes, thus allowing the viewer to catch-up even more quickly.

When the catching-up is finished, in the first playback mode, the HDR 3 switches from outputting television signals from the hard disk 13 to outputting television signals as received by one of the tuners 10a or 10b. In the second playback mode, the HDR 3 operates the hard disk 13 to switch to normal playback speed.

5.3 Substituting Broadcast Advertisements

The HDR 3 also is operable to play back pre-recorded advertisements from the hard disk 13 instead of advertisements received from the broadcaster. This feature is of interest when the HDR 3 is to be used in public premises, for example in pubs or sports bars during the transmission of sports events. In this latter example, it may be desirable to show, say, beer advertisements

which may tempt the addressed customer immediately to purchase a specific brand of beer.

The HDR 3 is arranged to receive signals transmitted by the broadcaster indicating the start and the end of advertisement breaks. On receipt of a signal by the HDR 3 indicating the start of an advertisement break, the processor 23 causes the hard disk 13 to replay a pre-recorded advertisement sequence which is displayed on the TV 2 instead of the television programme as received by one of the tuners 10a or 10b. Once the HDR 3 receives another signal indicating the end of the advertisement break, the processor 23 causes the hard disk 13 to terminate the playback of the pre-recorded advertisement sequence, such that the television programme as received by one of the tuners 10a or 10b is displayed again on the TV 2.

Furthermore, the HDR 3 is arranged to use the signals indicating the start and the end of advertisement breaks not to record advertisement breaks during the recording of a selected television programme. In this case, during the recording of a programme, the processor 23 controls the hard disk 13 to halt the recording on receipt of a signal indicating the start of an advertisement break. Subsequently, on receipt of a signal indicating the end of an advertisement break, the processor 23 controls the hard disk 13 to resume the recording.

Instead of using one signal each for indicating the start and the end of an advertisement break, the HDR 3 may be arranged to process to the same

effect signals indicating the start and the duration of an advertisement break.

In this alternative embodiment, the processor 23 switches back to the television programme as received, or operates the hard disk 13 to resume the recording, at the end of the indicated duration of the advertisement break.

5 Accordingly, no separate signals to indicate the end of advertisement breaks are required.

5.4 Programme Scheduling Information

The data in each channel is in compressed form, for example in accordance with the DVB/MPEG-2 standard as discussed hereinabove. DVB
10 allows both video data and other data to be combined in a single channel. In addition to the aforementioned operating data 43 (see Figure 3) for use in controlling access to channels, the data in a channel can include brief programme scheduling data representative of so-called event information tables (EITs) defining the scheduling of programmes in each channel as
15 scheduling events. The programme schedule data is used by the HDR 3 to control the operation of the hard disk 13. When the HDR 3 is pre-programmed to record a selected television programme, the HDR 3 operates the hard disk 13 to start and to stop the recording in accordance with the scheduling data which comprises the start and the end time of the selected
20 television programme. Since the scheduling data is updated regularly, the recording is started and stopped in accordance with the updated programme schedule, thus guaranteeing that a selected programme is actually recorded

even in case of a change of programme schedule, because such change is reflected in the programme schedule data in each channel.

The scheduling data may be stored in the RAM 26 and, once stored, the scheduling information is available effectively instantaneously for
5 controlling the operation of the hard disk 13. As discussed above, the scheduling data is transmitted regularly (say every 30 seconds) so that the HDR 3 will be updated substantially continuously. The information is brief to enable each channel to carry the scheduling data without excessive overheads in terms of bandwidth requirements in each channel and memory
10 requirements in the HDR.

In addition, it is envisaged that a dedicated IEPG channel will transmit more detailed programme scheduling information. The information transmitted via this dedicated channel is updated more frequently (say every 3 seconds) and cover a longer period of time (e.g. one week). As a
15 consequence, an up-to-date television programme schedule of a complete week will always be available. As will be explained in greater detail below, the HDR 3 is arranged to display the programme scheduling information on the TV 2. Also, a viewer can interact with the HDR 3 to program recordings of television programmes, view a desired part of the available programme
20 schedule, etc., on the basis of the information received via the dedicated IEPG channel.

Accordingly, while the programme scheduling data in each channel is used by the HDR 3 to operate the hard disk 13 to record a pre-programmed television programme in a selected channel at the correct up-to-date time, the programme scheduling data in the dedicated IEPG channel is used to display the programme schedule for several of the channels over a predetermined period of time (which in turn is used for programming the HDR 3 as will be described hereinbelow).

6. Operation of the HDR

The programme schedule information represented by the digital signals in the IEPG channel received via the satellite dish 4 can be displayed under viewer control via the remote control 28 on the TV 2. Selection of the menu key 105 causes the HDR 3 to output for display a main menu screen. (Similarly, selecting the TV guide key 106, the services key 107 or the interactive service key 108 will cause the HDR 3 to select an appropriate control menu screen for display to enable viewer interaction in respect of those services as described in our aforementioned international application WO97/23997).

A schematic representation of the services menu screen is shown in Figure 6. On top of the screen, menu items 60, 61 and 62 represent the available control menus, of which item 61 - corresponding to the currently displayed control menu - is highlighted. One of the other two control menus can be selected and displayed by pressing the TV guide key 106 or the

interactive service key 108 on the remote control 28, or by pressing the "left" or the "right" key 111/117, selection of which causes menu item 60 or 62 to be highlighted, respectively.

Similarly, menu items 63, 64, 65 and 66 of the services control menu
5 can be selected by using the "down" or the "up" key 109/110 on the remote control 28, causing the currently selected menu item 65 to be highlighted, followed by pressing the "execute" key 113.

6.1 Display of TV Programme Schedule

Figure 7 shows in simplified form a TV programme schedule screen
10 which is displayed on the TV screen after selection of the "TV guide" item 60 in Figure 5. Signals representing the TV programme schedule are received by the HDR 3 via the satellite dish 4 in a dedicated IEPG channel, as described above. The left-hand side column 67 in Figure 7 lists the available channels, while the right-hand side column 68 lists the television programmes for each
15 channel in chronological order. If not all available channels can be displayed on the screen, the viewer can cause the HDR 3 to display them by operating the "up" or "down" key 109/110 on the remote control 28, thereby causing the HDR 3 to make the screen to scroll up or down, respectively. Also, if the viewer wishes to move backward or forward in time to display earlier or
20 subsequent television programmes, he can do so by operating the "left" or the "right" key 111/112 on the remote control 28, respectively.

Likewise, the viewer may select one of the displayed television programmes by using the "up", "down", "left" and "right" keys 109-112 on the remote control. The currently selected programme "The Doors" is highlighted. If the viewer wished to select "Voyager" instead, he would have to operate the "down" key 110. If he wished to select "Deep Space Nine", he would have to operate the "down" key 110 followed by the "right" key 111.

6.2 Planner

If a selection of a programme is followed by an operation of the "record" key 100, then data representative of the selected programme is stored in the RAM 26. The selection of a programme and the resulting storage of data representative of the selected programme causes the HDR 3 to record on the hard disk 13 the selected programme at the time when it is scheduled to be broadcast. As discussed above, the hard disk 13 is operated to record the selected programme in accordance with the programme schedule data in the selected channel.

The data stored in the RAM 26 in response to a programme selection represents information concerning the title of the selected programme, its start and end times, as well as status information as to whether a selected programme is still to be recorded, whether it has been recorded or partially recorded and is still to be viewed, or whether a recorded programme has been partially viewed. All this information is displayable on the TV screen by sending an appropriate command to the HDR 3 via the remote control 28

which causes the HDR 3 to retrieve the corresponding data from the RAM 26 to display the information it represents. The displayed information will be referred to hereinafter as the "planner" because it allows a user to plan his personal television schedule by making appropriate selections.

5 The planner information is stored on the hard disk 13 in form of data representing a list of successive programmes over time. The processor 23 operates the hard disk 13 to record a television programme at the time stored in association with the first television programme to be recorded in this list. In response thereto, the status information associated with this programme is
10 updated to indicate that the programme has been recorded. The processor operates the hard disk 13 again at the time associated with the next programme in the list to be recorded, and so on.

A planner screen is illustrated schematically in Figure 6. When the planner screen is selected to be displayed on the TV 2, for example by a
15 selection of the menu item 65 in Figure 5, the processor 28 retrieves the data representing the planner information from the RAM 26 and causes the HDR 3 to display a planner screen as shown in of Figure 8.

Referring back to Figure 7, the movie "The Doors" is highlighted to indicate a user selection. Upon operation of the "execute" key 113 on the
20 remote control 28, information associated with "The Doors" is stored in the RAM 26, namely the date on which the "The Doors" is scheduled to be broadcast, the channel on which it is broadcast "Channel 4", the start and end

time of the broadcast, as well as the name of the programme ("The Doors"). Manipulation of the appropriate key on the remote control 28 causes the HDR 3 to display the planner screen of Figure 8. The names of the television programmes in the planner (reference numeral 71) are displayed together with the names of channels (reference numeral 72). In addition, status information (reference numeral 73) is displayed, indicative of whether a programme is stored on the hard disk 13 and has been viewed ("Trainspotting"), whether a programme has been partially viewed ("Get Carter"), whether a stored programme is yet to be viewed ("Friends"), or whether a programme is yet to be recorded on the hard disk 13 ("The Doors" and "Silverstone Grand Prix"). Signals representative of such status information are generated automatically by the processor 28, and the data representative thereof is stored in the memory RAM 26 on selection of a programme. The data in the RAM 26 is updated by the processor 28 once a status change has occurred, e.g. when a recorded and previously unviewed programme has been viewed.

The planner screen of Figure 8 can be used to control several of the functions of the HDR 3. For instance, a recorded programme can be replayed from the hard disk 13 by selecting the desired programme using the "up" and "down" keys 109, 110 and then by operating the "playback" key 99 on the remote control 28. In case of a partially-viewed programme (such as "Get Carter"), the viewer may resume viewing such programme by giving the same commands (selection followed by manipulation of the "playback" key 99).

The processor 23 then operates the hard disk 13 to jump to the point where the viewing was interrupted and resumes the playback (by operation of the HDR 3 as described above in greater detail).

Also, any of the programmes listed in the planner screen as recorded
5 on the hard disk 13 (such as "Friends") can be deleted from the hard disk 13 by selecting the same and then operating a "delete" key on the remote control 28. Such "delete" key in this embodiment is a colour key whose colour is indicated in box 74 in Figure 8. Also, a programme listed in the planner as to be recorded (such as "The Doors" or "Silverstone Grand Prix") can be deleted
10 by selecting the programme followed by operating another colour key on the remote control 28 corresponding to the colour indicated by box 75.

The planner screen as shown in Figure 8 furthermore allows for the execution of a "link" command by selecting one of the listed programmes followed by manipulating the colour key on the remote control corresponding
15 to the colour shown in box 76. The link command allows for programmes related to the one selected to be included into the planner programme list for recording.

A programme may be related in some way to other programmes to be transmitted at different times and/or on different channels by the same TV
20 service company. Obviously, programmes in daily or weekly serials are related to each other. Other relationships are less obvious. For example, a TV service company may wish to run a season of James Bond movies over a

number of different channels with each movie being shown one or more times. Broadcasting in the digital domain makes it possible to include in the data for the showings of each movie, together with further data linking that movie to other movies in the season. The processor 23 is arranged to respond
5 to such linking data by displaying prompts when the viewer selects one movie by executing the link command. The prompts alert the viewer to other movies in the season and ask the viewer whether he/she wishes any of the other movies to be included in the planner for recording.

Alternatively, the HDR 3 may be arranged to make such selection
10 automatically without prompting the user to confirm the selection. In this case, the automatically selected programmes may simply be included in the planner. Alternatively, they may be listed in a separate screen similar to the planner screen of Figure 8.

7. System Set-up

15 Figure 9 shows a system set-up screen as displayed when the system set-up item 64 of Figure 6 is selected. In this embodiment, three set-up parameters are listed. A first parameter 80 is shown as highlighted and allows for a selection of whether or not advertisements received from the broadcaster are substituted with pre-recorded advertisements, as described above. A
20 selection is performed by highlighting the parameter 80 by using the "up" and "down" keys 109, 110, and by manipulating the "left" and "right" keys 111, 112 on the remote control 28 which causes a menu item 81 associated with the

parameter 80 to switch between the settings "yes" and "no". Similarly, parameter 82 allows for a selection of whether or not advertisements not to be recorded during recording of a programme, as described above. A parameter 83 enables the user to activate or deactivate an automatic selection for recording of programmes linked to a programme previously selected by the user, as described above. The thus selected parameters are saved in the RAM 26 by selecting the parameter 84 and manipulating the "execute" key 113 on the remote control 28. The settings may be reset by manipulating the colour key on the remote control 28 which corresponds to the colour displayed in the box 85.

8. Advertisement Selection

When the "adverts" icon 66 of Figure 6 is selected, an advertisement selection screen is displayed as shown in Figure 10 of the accompanying drawings. The advertisement selection screen allows for selection of the category of advertisements which will be played back from the hard disk 13 if the "replace adverts" setting (parameter 80 in Figure 9) is activated (see above). The selection of the desired advertisement category is performed by manipulating the "up", "down", "right" and "left" keys 109-112 on the remote control 28 to highlight a desired category. In the advertisement selection screen in Figure 10, the category "Motoring" is highlighted (indicated by box 90). The highlighted category can then be activated, for example, by manipulating the "execute" key 113 on the remote control 28. An activated

category is marked by a tick 91. More than one category can be activated at the same time. In the example of Figure 10, the categories "food & drink" and "motoring" are activated.

5 It should be noted that the present invention is not limited to the embodiment as described above. It is envisaged that various modifications and variations to the above described embodiment can be made without falling outside the scope of the present invention as determined from the claims.

Claims:

1. A receiver for receiving signals representative of television programmes in a plurality of channels, the receiver comprising:
 - a first tuner for receiving signals in a first channel;
 - 5 a second tuner for simultaneously receiving signals in a second channel;
 - and
 - a recorder for recording data representative of signals in the first and the second channel received simultaneously by the first tuner and the second tuner.
- 10 2. The receiver of claim 1, further comprising:
 - a first data buffer for buffering data representative of signals received by the first tuner;
 - a second data buffer for buffering data representative of signals received by the second tuner; and
 - 15 a processor for selectively causing data to be transferred from the first data buffer or the second data buffer to the recorder for recording the transferred data.
- 20 3. The receiver of claim 2, wherein the first data buffer is arranged to receive signals from the first tuner representative of data at a first data rate, the second data buffer is arranged to receive signals from the second tuner representative of data at a second data rate, and the rate at which data is

transferred selectively from the first data buffer or the second data buffer to the recorder is equal to or higher than the first and second data rates combined, whereby the recorder is operable to record successively data buffered in the first and second data buffers representative of signals received simultaneously by the first and second tuners, respectively.

4. The receiver of claim 2 or 3, further comprising a third data buffer for buffering data from the recorder representative of television pictures to be displayed on a television screen, wherein the processor is arranged to transfer selectively data from the recorder to the third data buffer for outputting signals representative of the television pictures.

5. The receiver of claim 3 and 4, wherein the third data buffer is arranged to output signals representative of data at a third data rate, and the rate at which data is transferred selectively from the recorder to the third buffer is equal to or higher than the first, second and third data rates combined, whereby the recorder is operable successively to record data buffered in the first and the second data buffer, and to transfer data from the recorder to the third data buffer, the successively stored and transferred data being representative of signals simultaneously received by the first and the second tuners and output from the third data buffer, respectively.

6. The receiver of claim 5, wherein the rate at which data is transferred selectively from the first data buffer or the second data buffer to the recorder is equal to or higher than the first, second and third data rates combined.

5 7. The receiver of any preceding claim, wherein the recorder comprises a hard disk.

8. The receiver of any of claims 1 to 6, wherein the recorder comprises an optical storage medium.

10

9. A receiver for receiving signals in a plurality of channels, the signals being representative of television programmes and programme schedule data which defines events in terms of channels, programmes and broadcast times, the receiver comprising:

15 a decoder for separating the signals representative of the television programmes from the signals representative of the programme schedule data;

a recorder for recording data representative of the television programmes;

20 means for producing output signals defining an image of events in the programme schedule for displaying on a television screen, which schedule is in accordance with the received signals representative of the programme scheduling data; and

a user operable selector operable to select events identified in the image of events and responding to such user selection to cause the recorder to record data representative of the television programmes corresponding to the selected events.

5

10. The receiver of claim 9, wherein the recorder comprises a hard disk.

11. The receiver of claim 9, wherein the recorder comprises an optical storage medium.

10

12. The receiver of any of claims 9 to 11, wherein the receiver is arranged to receive signals representative of the programme schedule data in a dedicated one of the plurality of channels, the signals received in the dedicated channel being representative of the programme schedule data defining the events in the programme schedule over a predetermined period of time.

15

13. The receiver of claim 12, wherein the signals received in the dedicated channel is carried in the dedicated channel at closely spaced intervals or substantially continuously.

20

14. The receiver of any of claims 9 to 13, wherein the data representative of the image of events is updated at regular intervals in accordance with the received signals representative of the programme schedule data.
- 5 15. The receiver of any of claims 9 to 14, wherein the means for producing output signals is operable to output signals defining an image of symbols representing the events selected for recording, and/or of recorded events.
- 10 16. The receiver of claim 15, wherein the image of events selected for recording is updated at regular intervals in accordance with the received signals representative of the programme schedule data.
- 15 17. The receiver of claim 15 or 16, wherein the output signals defining an image of the events selected for recording, and/or of recorded events, include information associated with each of the events selected for recording, and/or of recorded events, representative of whether or not an event is still to be recorded, of whether it has been played back from the recorder, or whether it has been played back from the recorder partly.
- 20 18. The receiver of any of claims 9 to 17, wherein the receiver is arranged to automatically select for recording a second event in the programme schedule in

response to a user selection for recording a first event in the programme schedule having a predetermined relationship with the second event.

19. The receiver of claim 18, wherein the means for producing output
5 signals are operable to output signals defining an image of the events selected for recording automatically.

20. The receiver of any of claims 9 to 19, wherein the receiver is arranged to receive information signals in each of a number of the plurality of channels, the
10 information signals being representative of programme schedule data and being carried in each of the number of channels at closely spaced intervals or substantially continuously, the receiver further comprising:

a decoder circuit operable on the number of channels for separating the signals representative of television programmes from the signals representative
15 of the programme schedule data, wherein the receiver is arranged to cause the recorder to record in the number of channels selected events in the programme schedule in accordance with the programme schedule data represented by the received signals in the number of channels. respectively.

20 21. A receiver for receiving signals representative of a television programme, and for outputting simultaneously a signal representative of the television programme shifted in time, the receiver comprising a recorder for

recording data representative of the television programme, and for playing back data representative of the time-shifted television programme, wherein the receiver is operable to output signals representative of the television programme at an increased frame rate so as to reduce the time shift.

5

22. The receiver of claim 21, further comprising:

a first data buffer for buffering data representative of the television programme to be recorded by the recorder:

10 a second data buffer for buffering data being played back from the recorder; and

a processor for selectively causing data to be transferred from the first data buffer to the recorder at a first data rate or from the recorder to the second data buffer at a second data rate, wherein the second data rate is higher than the first data rate to cause the receiver to output signals representative of the television programme at the increased frame rate so as to reduce the time shift.

15

23. The receiver of claim 22, wherein the first data rate is in accordance with the bandwidth of received signals, and the second data rate is in accordance with a user-selected frame rate.

20

24. The receiver of any of claims 21 to 23, wherein the recorder comprises a hard disk.

25. The receiver of any of claims 21 to 23, wherein the recorder comprises an optical storage medium.

5 26. A receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and information signals indicative of a predetermined portion of the television programme, the receiver comprising:

a decoder circuit for generating control signals responsive to receipt of
10 the information signals; and

a recorder for receiving the control signals, and for recording data representative of the received television signals, the recorder being responsive to the control signals to interrupt recording of data representative of the received television signals during reception of television signals representative of the
15 predetermined portion of the television programme.

27. The receiver of claim 26, wherein the information signal comprises a first information signal representative of the start of the predetermined portion of the television programme, and a second information signal representative of
20 the end of the predetermined portion, wherein the decoder is arranged to generate a first control signal responsive to receipt of the first information signal, and a second control signal responsive to receipt of the second

information signal, and the recorder is arranged to interrupt the recording of data representative of received television signals responsive to receipt of the first control signal, and to resume the recording of data representative of received television signals responsive to receipt of the second control signal.

5

28. The receiver of claim 26, wherein the information signals and the control signals are indicative of the duration of the predetermined portion of the television programme, wherein the recorder is arranged to respond to receipt of one of the control signals by interrupting the recording of data representative of received television signals for the duration indicated by the one control signal.

10

29. The receiver of any of claims 26 to 28, wherein the recorder comprises a hard disk.

15

30. The receiver of any of claims 26 to 28, wherein the recorder comprises an optical storage medium.

31. A receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and information signals indicative of a predetermined portion of the television programme, the receiver comprising:

20

a decoder circuit for generating control signals responsive to receipt of the information signals;

a storage medium for storing video data for display on a television screen; and

5 output means for receiving the control signals, and for outputting selectively for display on a television screen received television signals or video signals representative of the video data from the storage medium, the output means being responsive to the control signals to output the video signals during reception of television signals representative of the predetermined portion of the
10 television programme.

32. The receiver of claim 31, wherein the information signal comprises a first information signal representative of the start of the predetermined portion of the television programme, and a second information signal representative of
15 the end of the predetermined portion, the decoder is arranged to generate a first control signal responsive to receipt of the first information signal, and a second control signal responsive to receipt of the second information signal, and the output means is arranged to output the video signals responsive to receipt of the first control signal, and to output the television signals responsive to receipt of
20 the second control signal.

33. The receiver of claim 31, wherein the information signals and the control signals are indicative of the duration of the predetermined portion of the television programme, wherein the output means is arranged to respond to receipt of one of the control signals by outputting the video signals for the
5 duration indicated by the one control signal.

34. The receiver of any of claims 31 to 33, wherein the storage medium comprises a hard disk.

10 35. The receiver of any of claims 31 to 33, wherein the storage medium comprises a CD.

36. A receiver for receiving signals in a plurality of channels, the signals comprising television signals representative of a television programme, and
15 information signals indicative of the start and/or the end of a predetermined portions of the television programme, the receiver further comprising:

a recorder for recording data representative of received signals, and for playing back recorded data for display on a screen of the television programme represented thereby; and

20 user operable control means operable to cause the recorder to detect recorded data representative of the information signals to skip to the start and/or

end of the predetermined portion of the television programme during playback
of the recorded data.

37. The receiver of claim 36, wherein the recorder comprises a hard disk.

5

38. The receiver of claim 36, wherein the recorder comprises an optical
storage medium.

39. A receiver substantially as described herein with reference to the
10 accompanying drawings.

1 / 7

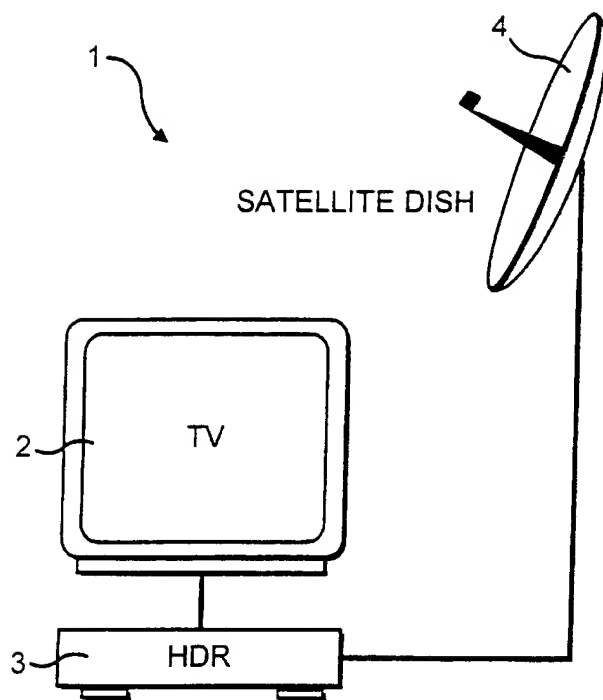


FIG. 1

2 / 7


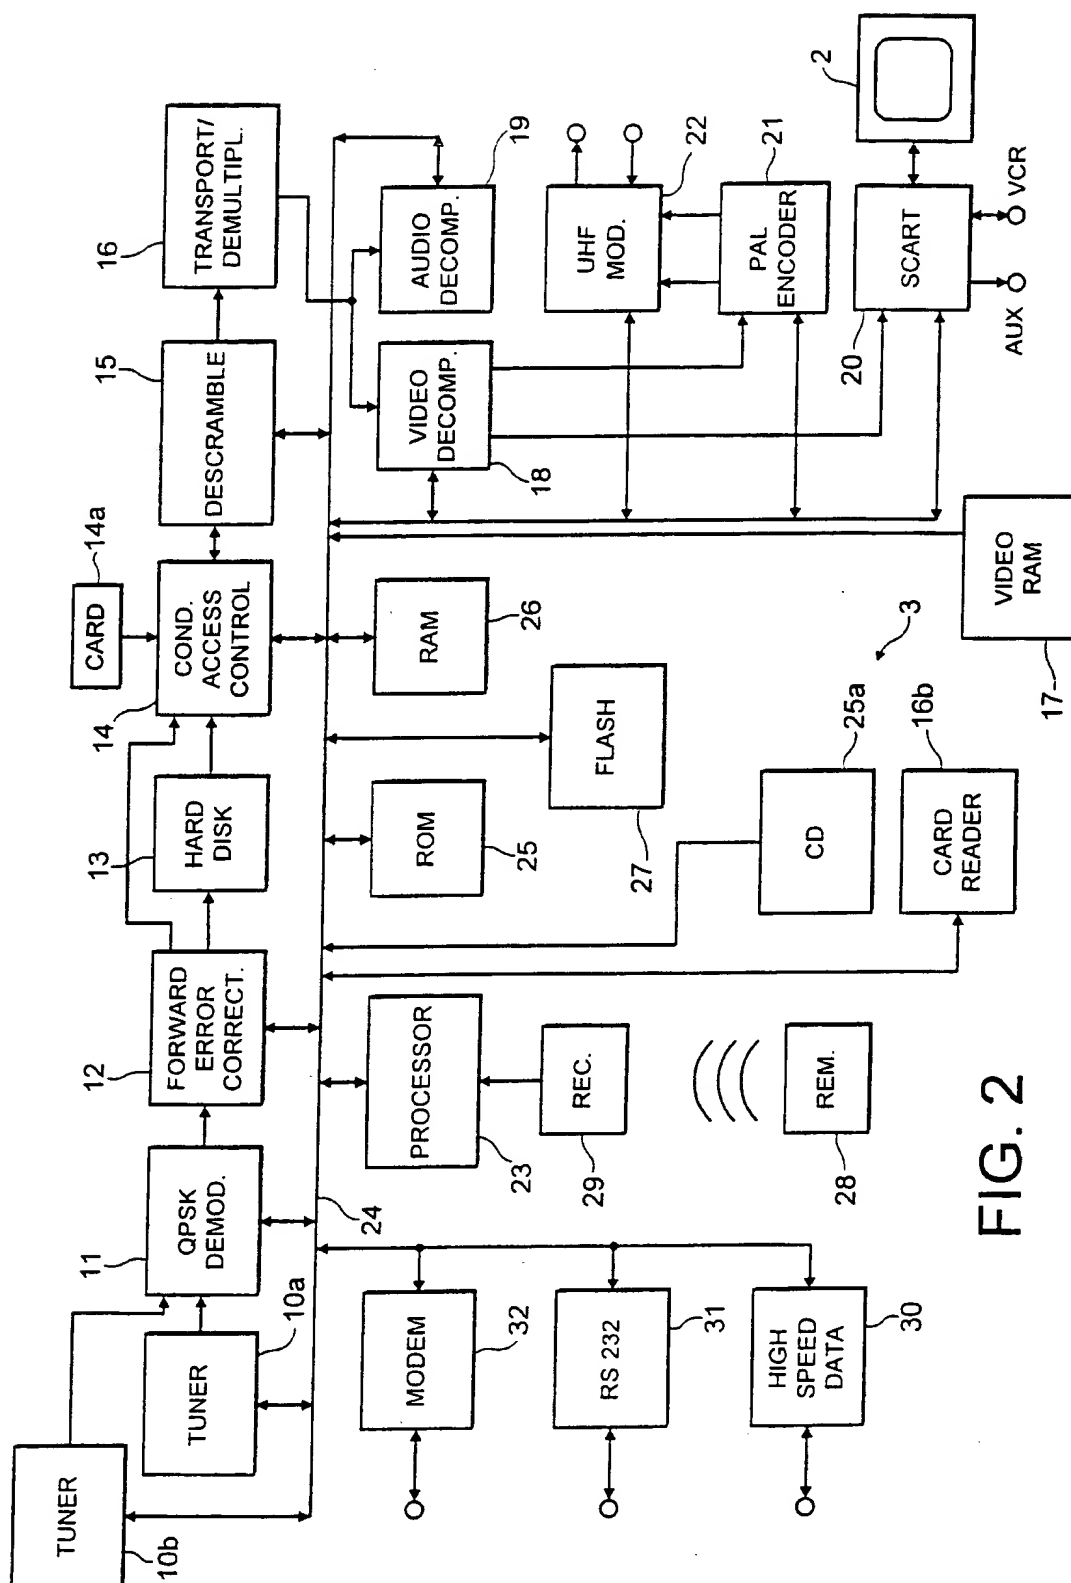


FIG. 2

FIG. 3

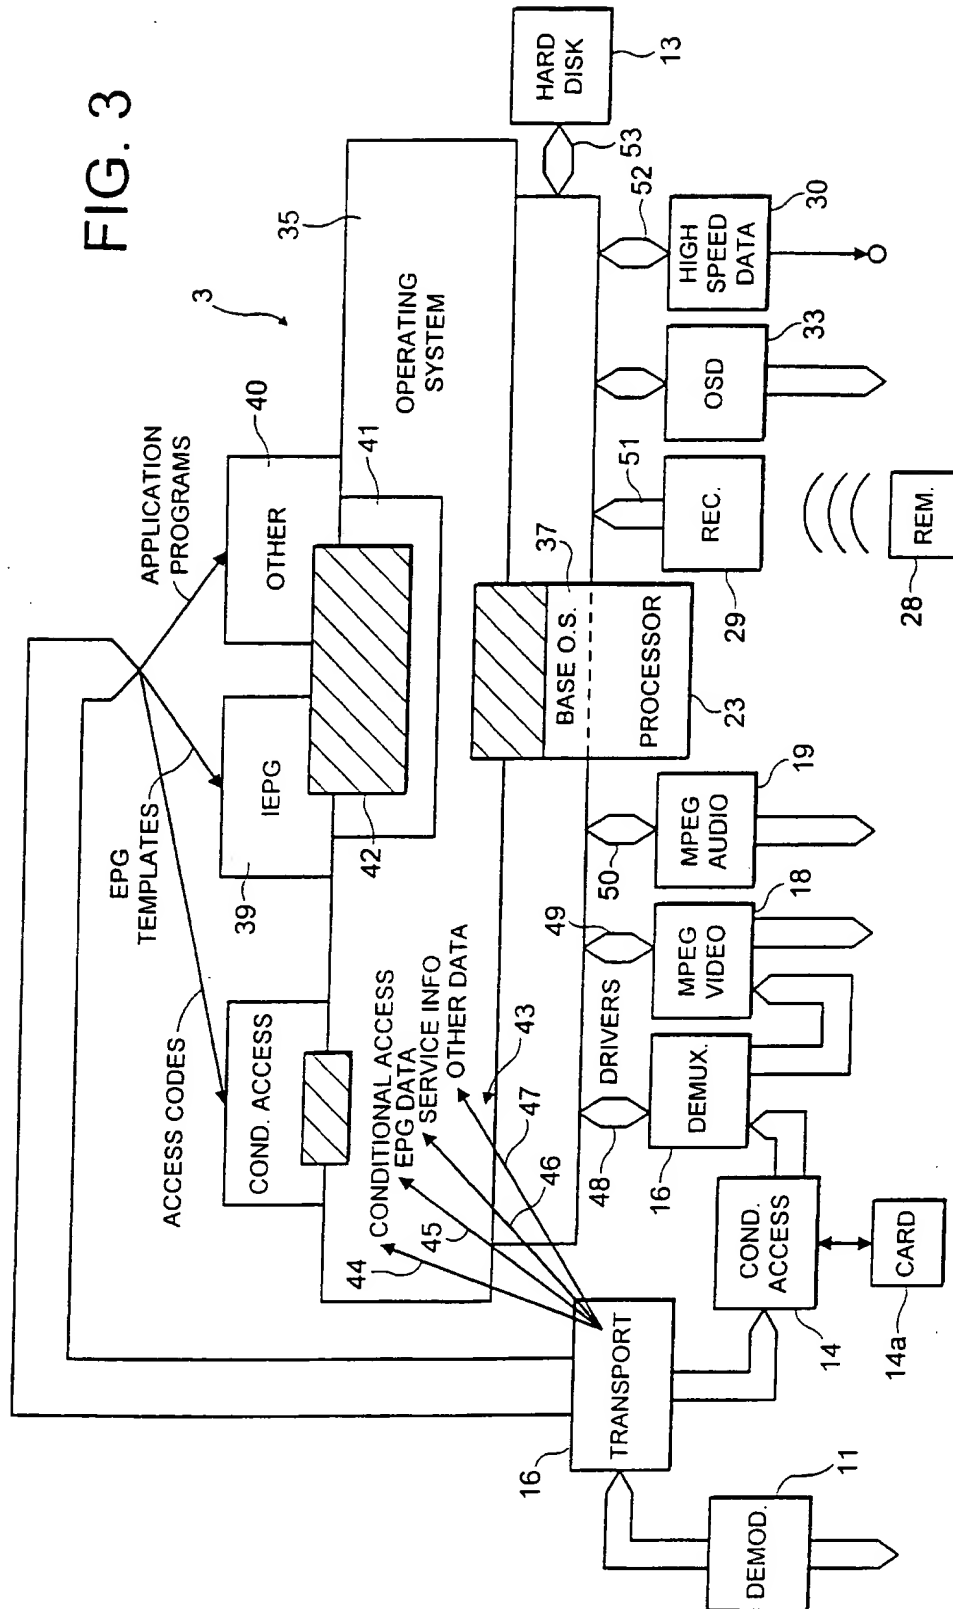

4 / 7

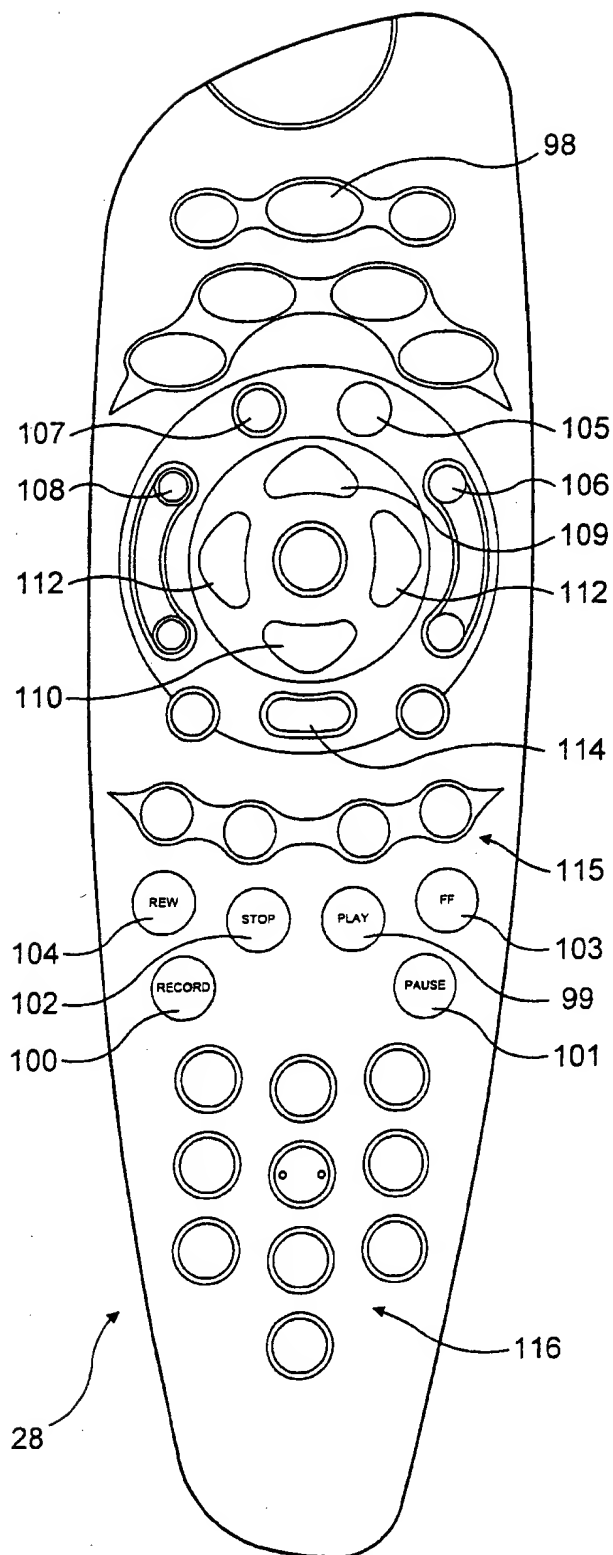


FIG. 4

SUBSTITUTE SHEET (RULE 26)

5 / 7

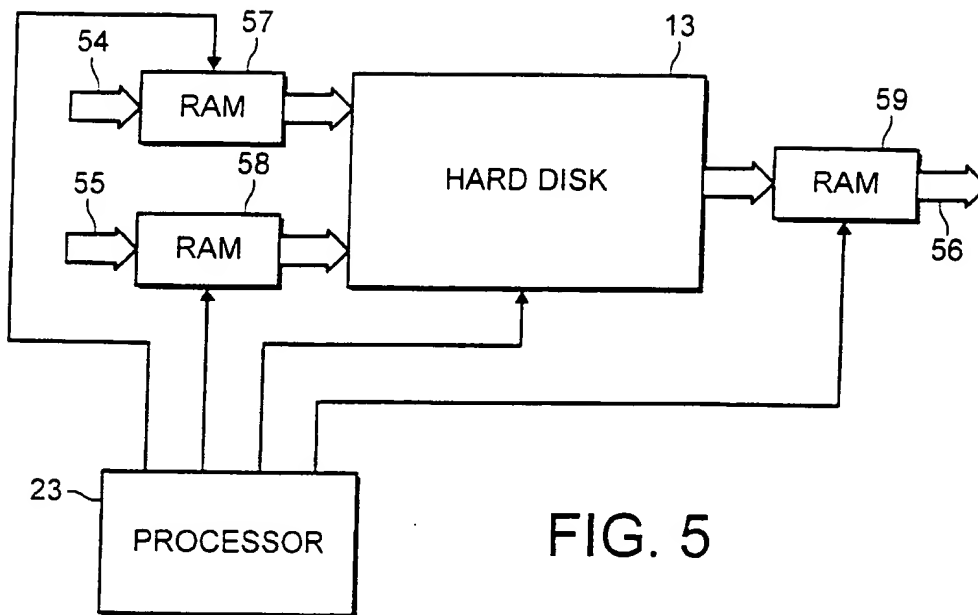


FIG. 5

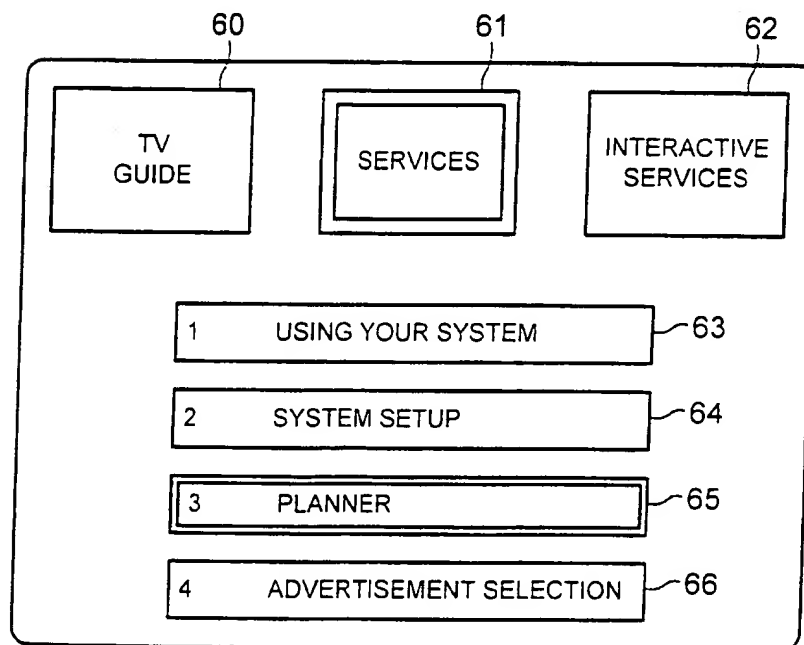


FIG. 6

SUBSTITUTE SHEET (RULE 26)

6 / 7

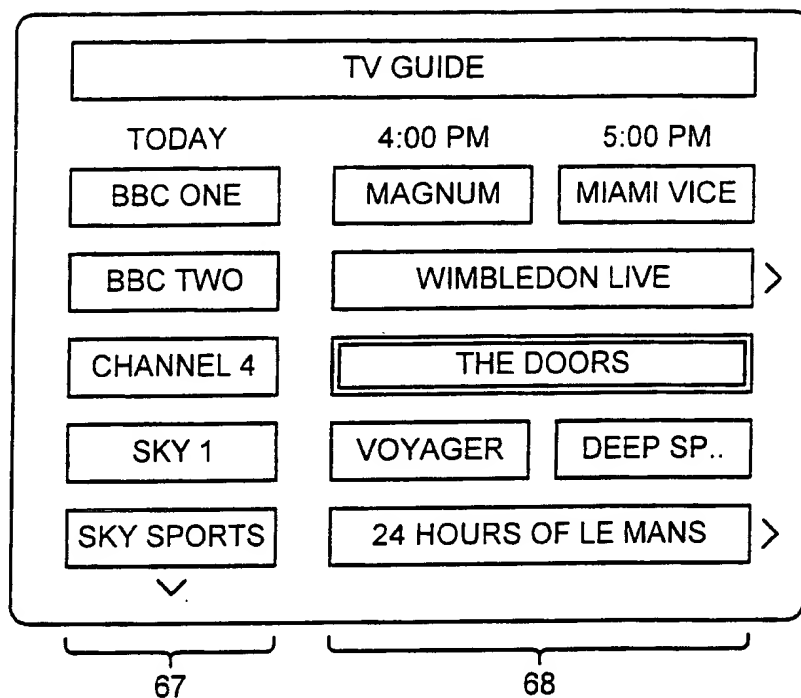


FIG. 7

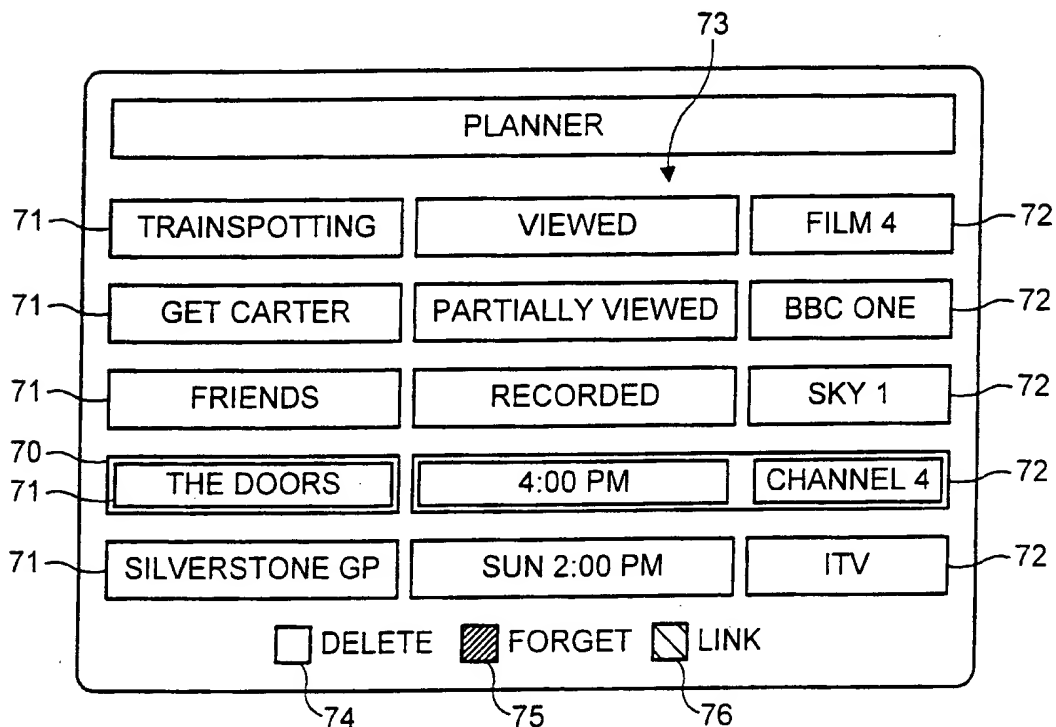


FIG. 8

SUBSTITUTE SHEET (RULE 26)

7 / 7

FIG. 9 is a screenshot of a "SYSTEM SETUP" screen. The screen is enclosed in a rounded rectangle. At the top is a title bar labeled "SYSTEM SETUP". Below it are several options, each with a corresponding button or checkbox. On the left side, there are labels 80, 82, 83, 84, and 85 pointing to specific elements. Option 80 is "REPLACE ADVERTS" with a button labeled "NO" (indicated by 81) and arrowheads. Option 82 is "SKIP ADVERTS WHEN RECORDING" with a button labeled "YES". Option 83 is "SUGGEST PROGRAMMES" with a button labeled "NO". Option 84 is "SAVE NEW SETTINGS". Option 85 is a checkbox labeled "RESET ALL SETTINGS", which is currently checked.

SYSTEM SETUP	
80	REPLACE ADVERTS < NO > 81
82	SKIP ADVERTS WHEN RECORDING YES
83	SUGGEST PROGRAMMES NO
84	SAVE NEW SETTINGS
85	<input checked="" type="checkbox"/> RESET ALL SETTINGS

FIG. 9

FIG. 10 is a screenshot of an "ADVERTISEMENTS" screen. The screen is enclosed in a rounded rectangle. At the top is a title bar labeled "ADVERTISEMENTS". Below it are two columns of category buttons. On the right side, there are labels 90 and 91 pointing to specific elements. Label 90 points to the "MAGAZINES" button. Label 91 points to the "MOTORING" button, which has a checkmark next to it. Other categories include "AUDIO, TV & VIDEO", "BOOKS", "CLOTHING", "COMPUTERS", "FOOD & DRINK", "GARDENING", "MUSIC", "OFFICE", "PHOTOGRAPHIC", and "SPORTS".

ADVERTISEMENTS	
AUDIO, TV & VIDEO	MAGAZINES 90
BOOKS	MOTORING 91 ✓
CLOTHING	MUSIC
COMPUTERS	OFFICE
FOOD & DRINK ✓	PHOTOGRAPHIC
GARDENING	SPORTS

FIG. 10

SUBSTITUTE SHEET (RULE 26)

INTERNATIONAL SEARCH REPORT

Internatic Application No
PCT/GB 00/03065

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 5 371 551 A (LOGAN JAMES ET AL) 6 December 1994 (1994-12-06) column 2, line 17 - line 35 column 3, line 8 - line 23 column 4, line 14 - line 23 column 4, line 40 -column 5, line 6 ---	1,7,8 2-6
X A	EP 0 785 675 A (TOKYO SHIBAURA ELECTRIC CO) 23 July 1997 (1997-07-23) abstract column 11, line 42 -column 13, line 24 ---	1,7,8 2-6
A	WO 99 22513 A (KONINKL PHILIPS ELECTRONICS NV ;PHILIPS AB (SE)) 6 May 1999 (1999-05-06) abstract page 2, line 16 -page 3, line 26 --- -/--	1-8

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

22 December 2000

Date of mailing of the international search report

05/01/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Marie-Julie, J-M

INTERNATIONAL SEARCH REPORT

Internatic Application No
PCT/GB 00/03065

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 784 401 A (TOKYO SHIBAURA ELECTRIC CO) 16 July 1997 (1997-07-16) column 7, line 23 - line 33 ----	1-8
E	EP 0 940 985 A (MATSUSHITA ELECTRIC IND CO LTD) 8 September 1999 (1999-09-08) page 5, line 46 -page 6, line 41 page 7, line 31 -page 9, line 49 ----	9-20
X	WO 98 26584 A (PREVUE INTERNATIONAL INC) 18 June 1998 (1998-06-18) page 11, line 21 -page 12, line 20 page 38, line 19 -page 39, line 11 ----	9-16,20 17
X	US 5 852 474 A (ISHIBASHI ATSUSHI ET AL) 22 December 1998 (1998-12-22) column 10, line 24 -column 12, line 63 ----	21-25
X	US 5 774 186 A (MILLMAN STEVEN EDWARD ET AL) 30 June 1998 (1998-06-30) abstract column 7, line 30 - line 51 ----	21-23 1-8,24, 36-38
X	US 5 774 170 A (BEAUREGARD ROBERT G ET AL) 30 June 1998 (1998-06-30) column 13, line 58 -column 14, line 59 ----	31-35
X	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 14, 31 December 1998 (1998-12-31) & JP 10 243307 A (AIWA CO LTD), 11 September 1998 (1998-09-11) abstract ----	31 32-35
P,X	WO 99 66719 A (WEBTV NETWORKS INC) 23 December 1999 (1999-12-23) page 5, line 15 -page 7, line 11 page 21, line 27 -page 23, line 21 ----	31-35
X	US 5 696 866 A (FIELDS KYLE ET AL) 9 December 1997 (1997-12-09) column 8, line 60 -column 12, line 16 ----	36 37,38
X	US 5 659 653 A (DIEHL ERIC ET AL) 19 August 1997 (1997-08-19) the whole document -----	36 37,38

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5371551 A	06-12-1994	US RE36801 E	01-08-2000
EP 0785675 A	23-07-1997	JP 9200691 A	31-07-1997
		CA 2195161 A	17-07-1997
WO 9922513 A	06-05-1999	EP 0948863 A	13-10-1999
EP 0784401 A	16-07-1997	JP 9200690 A	31-07-1997
		CA 2194947 A	13-07-1997
		US 6034732 A	07-03-2000
EP 0940985 A	08-09-1999	JP 11252471 A	17-09-1999
		AU 1855599 A	16-09-1999
		CN 1235473 A	17-11-1999
WO 9826584 A	18-06-1998	AU 5696898 A	03-07-1998
		BR 9714391 A	16-05-2000
		CN 1244990 A	16-02-2000
		EP 0945003 A	29-09-1999
		HU 0000446 A	28-06-2000
		NO 992703 A	09-08-1999
		PL 334062 A	31-01-2000
		AU 8913098 A	05-04-1999
		EP 1008260 A	14-06-2000
		WO 9914947 A	25-03-1999
US 5852474 A	22-12-1998	JP 9065225 A	07-03-1997
US 5774186 A	30-06-1998	JP 9233415 A	05-09-1997
		KR 196892 B	15-06-1999
US 5774170 A	30-06-1998	NONE	
JP 10243307 A	11-09-1998	NONE	
WO 9966719 A	23-12-1999	AU 4681999 A	05-01-2000
US 5696866 A	09-12-1997	US 5692093 A	25-11-1997
		US 5333091 A	26-07-1994
		US 5455630 A	03-10-1995
		AU 694568 B	23-07-1998
		AU 3680295 A	29-03-1996
		BR 9508912 A	02-06-1998
		CA 2199485 A	21-03-1996
		EP 0781486 A	02-07-1997
		JP 10507884 T	28-07-1998
		WO 9608921 A	21-03-1996
		US 5987210 A	16-11-1999
		US 5999688 A	07-12-1999
		AT 173857 T	15-12-1998
		AU 689463 B	02-04-1998
		AU 6084394 A	15-08-1994
		BR 9405709 A	28-11-1995
		CA 2153398 A	21-07-1994
		DE 69414839 D	07-01-1999
		DE 69414839 T	08-07-1999
		EP 0693215 A	24-01-1996
		JP 8507633 T	13-08-1996

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 00/03065

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5696866 A		WO 9416442 A	21-07-1994
US 5659653 A	19-08-1997	EP 0627857 A	07-12-1994
		JP 7072276 A	17-03-1995
		DE 69416719 D	08-04-1999
		DE 69416719 T	22-07-1999
		ES 2130303 T	01-07-1999
		SG 48389 A	17-04-1998
		BE 878678 A	31-12-1979
		DE 2936511 A	20-03-1980
		FR 2435495 A	04-04-1980
		GB 2032908 A	14-05-1980
		IT 1123550 B	30-04-1986
		JP 55038884 A	18-03-1980
		NL 7906767 A	13-03-1980

THIS PAGE BLANK (USPTO)